




ADVANCED POLYMER, INC.

GET THE API ADVANTAGE . . .

APS-689

APS-689 is a fluorine modified silicone fluid that exhibits a low coefficient of friction and excellent release properties. APS-689 is well suited for use as a specialty lubricant additive or as a mold release agent.

CHEMICAL STRUCTURE

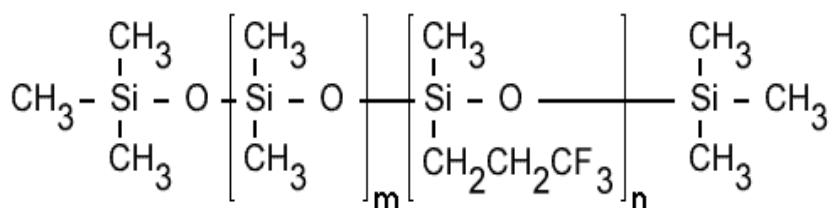

APPLICATIONS

- Lubricant Additive
- Release Agent
- Defoaming Agent
- Additive to Improve Chemical Resistance

STORAGE

When stored in a sealed container at temperatures between 5°C and 30°C, APS-689 has a prolonged shelf life.

PACKAGING

APS-689 is available in 8 oz. samples and 440-lb. drums.

Advanced Polymer, Inc.

400 Paterson Plank Road
Carlstadt, NJ 07072
Tel: (201) 933-0689
Fax: (201) 933-8442
www.advpolymer.com

I want to know more!

technical@advpolymer.com

TYPICAL PROPERTIES

Appearance:	Clear, odorless fluid
Ionic Nature	Nonionic
Viscosity (@ 25°C):	100 cstk
Refractive Index (@ 25°C):	1.4
Specific Gravity (@ 25°C):	0.99

You may also be
interested in . . .

- APS-690
- APS-691
- APS-692

The information set forth herein is furnished free of charge and based on technical data that Advanced Polymer, Inc. believes to be reliable. It is intended for use by persons having technical skill at their own risk. Because conditions of use are outside our control, we make no warranties, express or implied, and assure no liability in connection with any use of this information. Nothing herein is to be taken as license to operate under or a recommendation to infringe any patents.

Revised March 28, 2016